



**It's not magic, it's engineering.®**

Impact and Airborne Sound Control

## GENIEMAT® FF

Continuous Floating Floor Systems for Airborne & Impact Sound and Vibration Isolation



AUSTRALIA EDITION

Patents: US 8240430, US 8556029, CA 2500956, CA 2503420



# GENIEMAT<sup>®</sup> FF

## The next generation of acoustic floating floor

### PRODUCT FEATURES


- Continuous underlayment system that limits surface area contact down to 4% at 1400 kg/m<sup>2</sup>
- Achieves low natural frequency with systems available as low as 6 Hz
- Can be safely loaded over a wide range up to 100 kg/cm<sup>2</sup>
- Composed of 92% recycled rubber content
- Aids in Part 5.4 Building Code Approval
- Systems can be designed to meet Section 9 of the AAAC "Guidelines for Apartment and Townhouse Acoustic Rating"
- Integrated vapor barrier
- Mould, bacteria, fungi, and water resistant
- Penetrations for pipes, ductwork, electrical conduits, and drains are easily accommodated
- Rolls out quickly and is easy to install without the need for adhesive
- Can be used directly under screed, lightweight, or normal weight concrete with no plywood formwork required

**GenieMat FF** is used for multiple applications. Contact our engineers for your project specific questions.

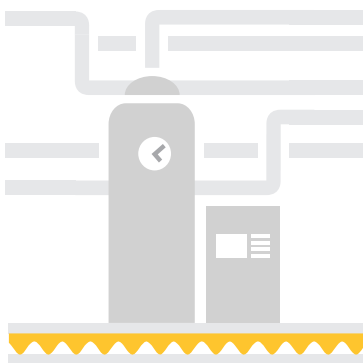

# EASY INSTALLATION

ROLL IT OUT - TAPE THE SEAMS - READY TO POUR

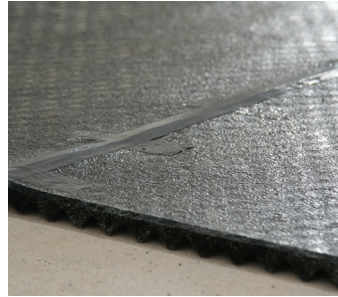

Step 1

Step 2

Step 3

Step 4

After installing perimeter isolation strips on the base of the walls, unroll **GenieMat® FF**.

Duct tape all joints and seams, including between the perimeter isolation strips and the **GenieMat FF**.







Pour screed, lightweight or normal weight concrete topping.

Prepare concrete surface for floor finish.

## SIGNIFICANTLY IMPROVES INSTALLATION EFFICIENCY

STEPS	GENIEMAT® FF ROLL OUT SYSTEM	PLYWOOD FORMWORK ISOLATOR BASED SYSTEMS	SPRING JACK-UP TYPE SYSTEM
1	Install <b>GenieMat PMI</b>	Design isolator layout	Coordinate load requirements with associated trades
2	Roll out <b>GenieMat FF</b>	Install perimeter isolation	Design isolator layout based on equipment placement
3	Tape the seams	Roll out mineral fiber matting with fiberglass isolators	Install perimeter Isolation
4	Layout reinforcement and pour concrete	Install additional isolators based on load design	Verify equipment placement, snap chalk lines and spray paint isolator locations
5		Check isolators orientation and location	Layout clear polyethylene plastic sheathing
6		Cut and install plywood formwork	Layout isolators and place rebar grid
7		Install steel connecting corner plates	Pour concrete and cure to 17.2 MN/m <sup>2</sup> minimum
8		Layout reinforcement, waterproof membrane and pour concrete	Remove all isolator cover plates
9			To raise slab 50 mm, complete 2 turns of each isolator 8-10 times
10			Replace cover plates and pour additional floor levelling compound

# GENIEMAT<sup>®</sup> FF PHYSICAL PROPERTIES

PLAN VIEW	PRODUCT	THICKNESS	DIMENSION	WEIGHT	AREA
	<b>GenieMat FF06</b>	nom. 6 mm	Rollgood: 1.2 m wide, 9.1 m long	36 kg/roll	11.1 m <sup>2</sup>
	<b>GenieMat FF10</b>	nom. 10 mm	Rollgood: 1.2 m wide, 9.1 m long	59 kg/roll	11.1 m <sup>2</sup>
	<b>GenieMat FF17</b>	nom. 17 mm	Rollgood: 1.2 m wide, 4.6 m long	47 kg/roll	5.6 m <sup>2</sup>
	<b>GenieMat FF25</b>	nom. 25 mm	Rollgood: 1.2 m wide, 4.6 m long	60 kg/roll	5.6 m <sup>2</sup>
	<b>GenieMat FF50</b>	nom. 51 mm	Rollgood: 1.2 m wide, 4.6 m long	82 kg/roll	2.8 m <sup>2</sup>
	<b>GenieMat FF75</b>	nom. 75 mm	Rollgood: 1.2 m wide, 4.6 m long	180 kg/roll	1.9 m <sup>2</sup>

## COMPRESSIBLE ELASTOMER TECHNOLOGY ALLOWS FOR LOW NATURAL FREQUENCY AT LOW LOADS

Typical vulcanized, natural, and neoprene rubber isolators are defined as incompressible. They require heavy mass loading in order to obtain adequate deflection, and consequently, vibration isolation. For applications where minimum loading criteria are not met, data shows the systems do not perform well.


Fiberglass isolators are comprised of rigid particles that lose elasticity when compressed. Data shows a dramatic performance degradation over time.

# GENIEMAT<sup>®</sup> FF PROPERTIES


PRODUCT	100 mm Concrete (2.4 kN/m <sup>2</sup> Dead Load)			Typical Loading (19.2 kN/m <sup>2</sup> dead + live load)		
	NATURAL FREQUENCY (HZ)	10 HZ DYNAMIC STIFFNESS (N/MM/MM <sup>2</sup> )	CRITICAL DAMPING RATIO	NATURAL FREQUENCY (HZ)	10 HZ DYNAMIC STIFFNESS (N/MM/MM <sup>2</sup> )	CRITICAL DAMPING RATIO
<b>GenieMat FF06</b>	27	0.0068	9.5%	25	0.047	8.4%
<b>GenieMat FF10</b>	25	0.0059	9.7%	22	0.037	9.6%
<b>GenieMat FF17</b>	23	0.0053	12.5%	18	0.025	11.2%
<b>GenieMat FF25</b>	22	0.0045	11.5%	16	0.020	10.8%
<b>GenieMat FF50</b>	18	0.0030	10.2%	12	0.011	9.7%
<b>GenieMat FF75</b>	16	0.0022	9.6%	10	0.008	9.1%

## DESIGN PARAMETERS OF GENIEMAT FF SYSTEMS

System Natural Frequency vs. Load

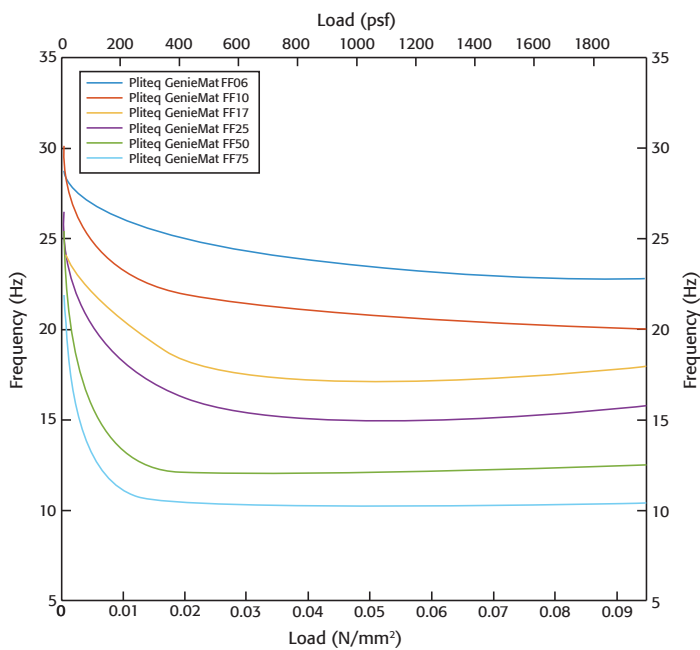


Deflection vs. Load

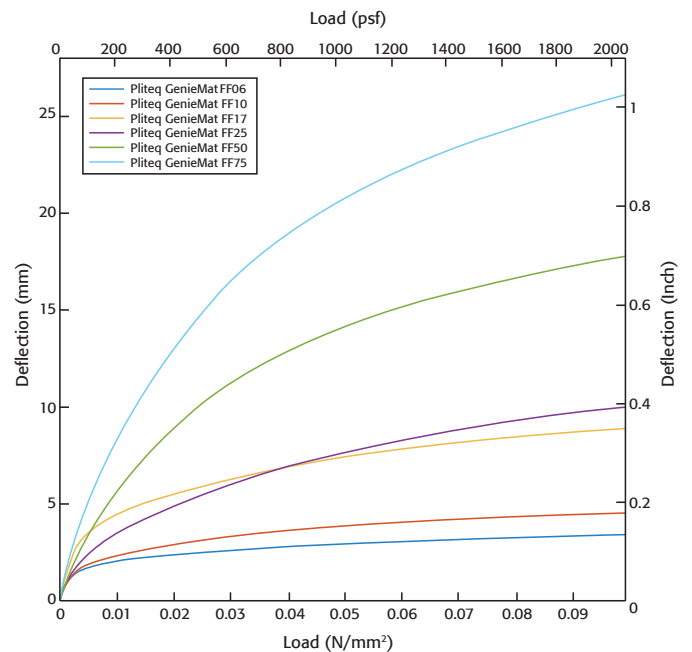


# GENIEMAT® FF ACOUSTIC TEST DATA

## 150 mm STRUCTURAL SLAB WITH FLOATING CONCRETE TOPPING


### 100 mm Concrete Topping on GenieMat FF25 on 150 mm Structural Slab

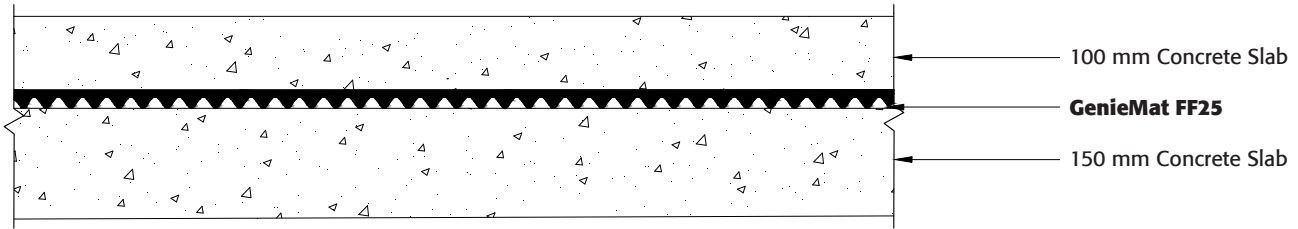

### 100 mm Concrete Topping on GenieMat FF50 on 150 mm Structural Slab

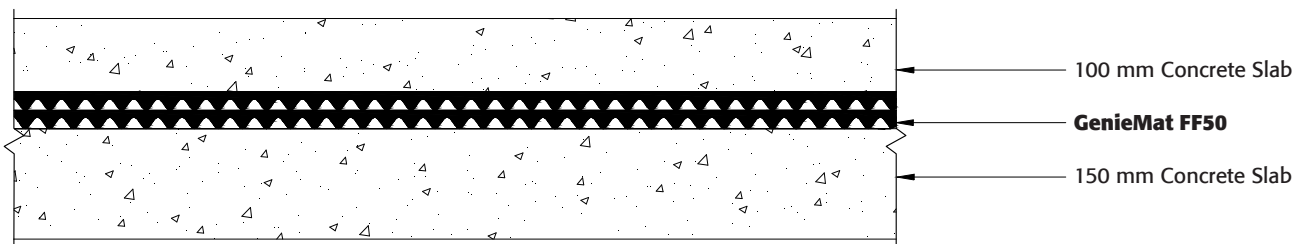


### 100 mm Concrete Topping on GenieMat FF75 on 150 mm Structural Slab

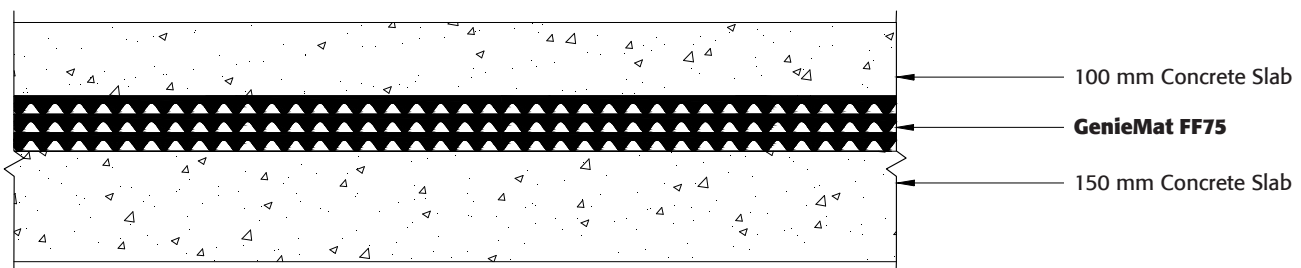


# GENIEMAT® FF ACOUSTIC TEST DATA

## 60 mm Screed on GenieMat FF06

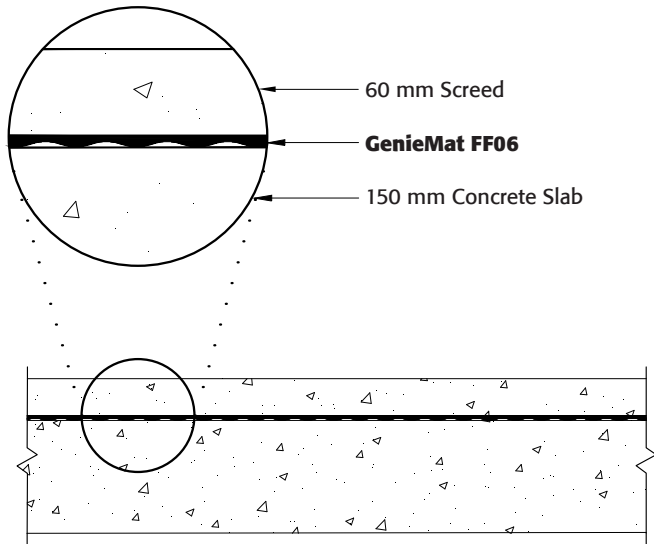


59  $R_w$       52  $L_{N,W}$   
 F289-41701    F290-41701

## 60 mm Screed on GenieMat FF10

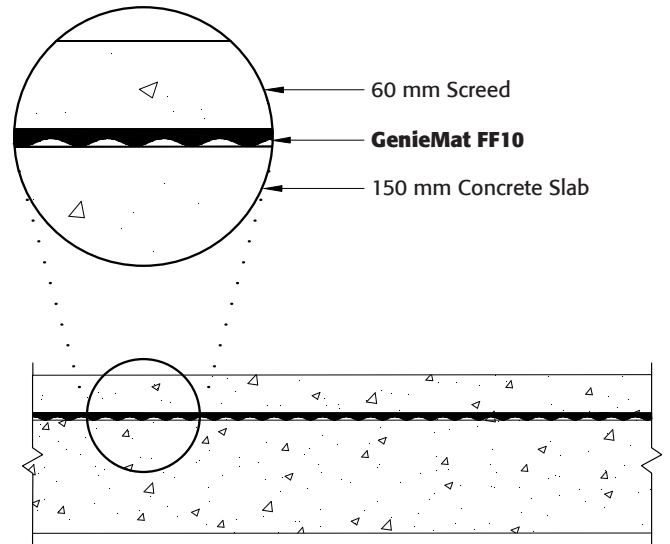


59  $R_w$       51  $L_{N,W}$   
 F292-41702    F291-41702

## 60 mm Screed on GenieMat FF17

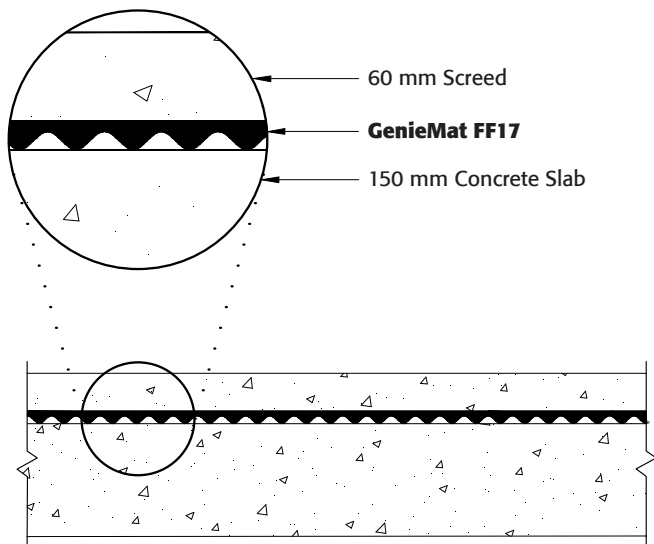

60  $R_w$       49  $L_{N,W}$   
 F293-41702    F294-41702

## 60 mm Screed on GenieMat FF25

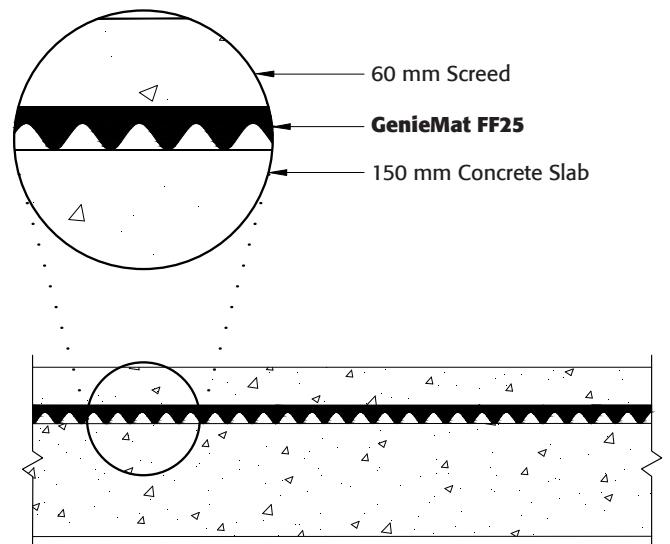


61  $R_w$       47  $L_{N,W}$   
 F296-41702    F295-41702

# GENIEMAT® FF ACOUSTIC TEST DATA


## 150 mm CONCRETE SLAB WITH PLYWOOD TOPPING

### 2 Layers of Plywood on GenieMat FF50

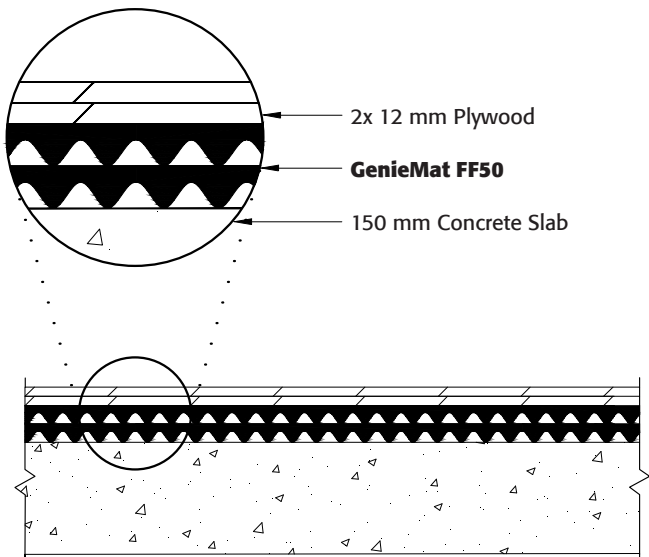

B3498.13


### 3 Layers of Plywood on GenieMat FF50

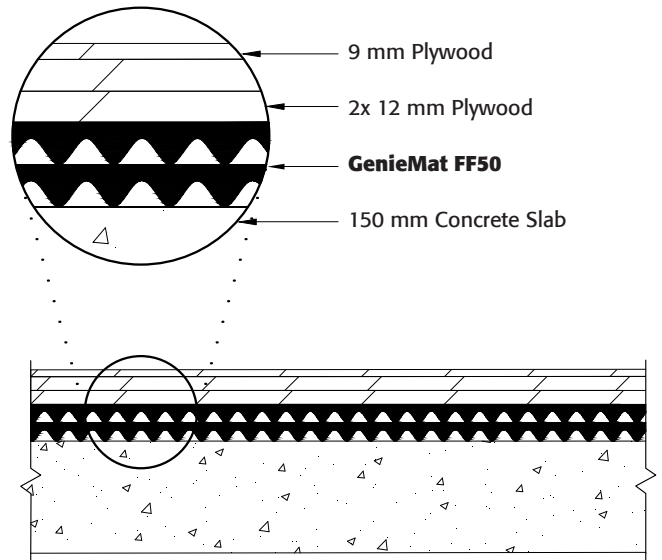

5014148


7014204

### 2 Layers of AdvanTech® on GenieMat FF25

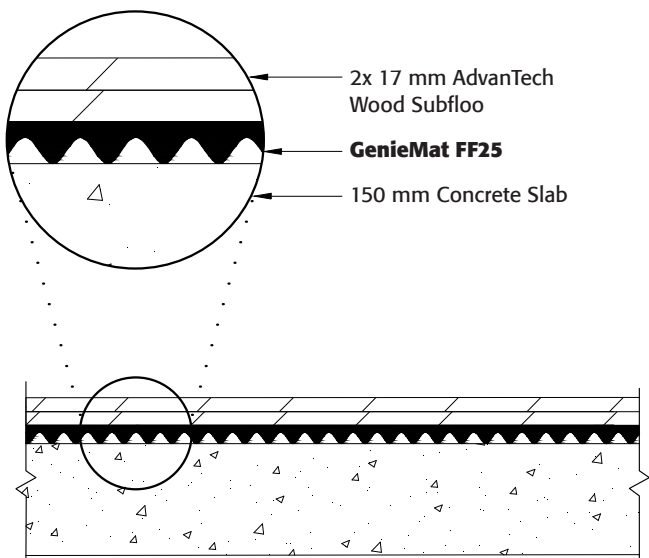

G2953.04

### 50 mm AdvanTech Cement Board Raft on GenieMat FF25

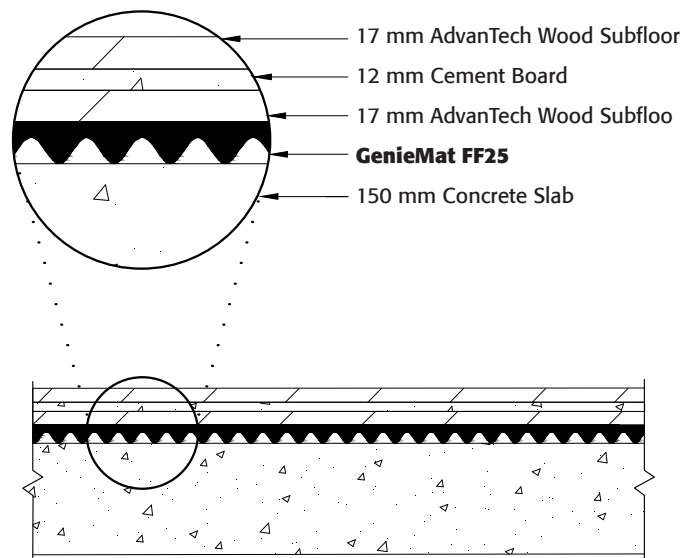


G2953.05



# GENIEMAT® FF ACOUSTIC TEST DATA


## CROSS LAMINATED TIMBER ASSEMBLIES

### 175 mm Cross Laminated Timber with 100 mm Concrete Topping on GenieMat FF25

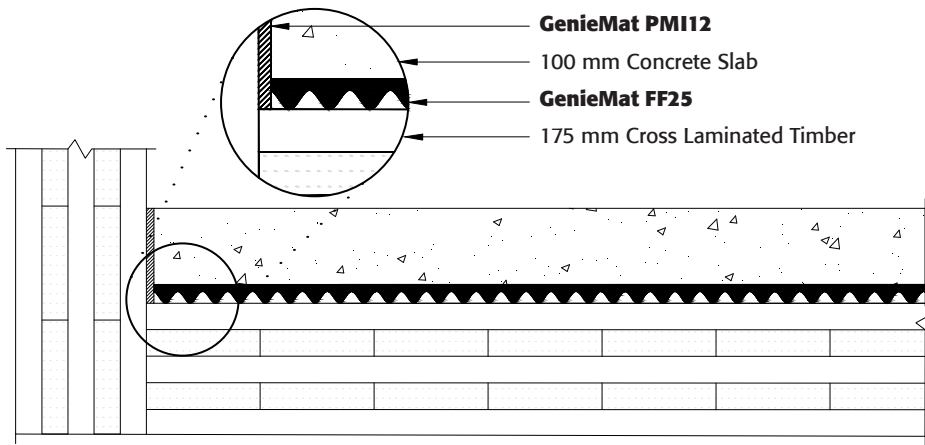


57  $R_w$       60  $L_{N,W}$   
 F5500.08

### 175 mm Cross Laminated Timber with 50 mm Screed Topping on GenieMat FF25

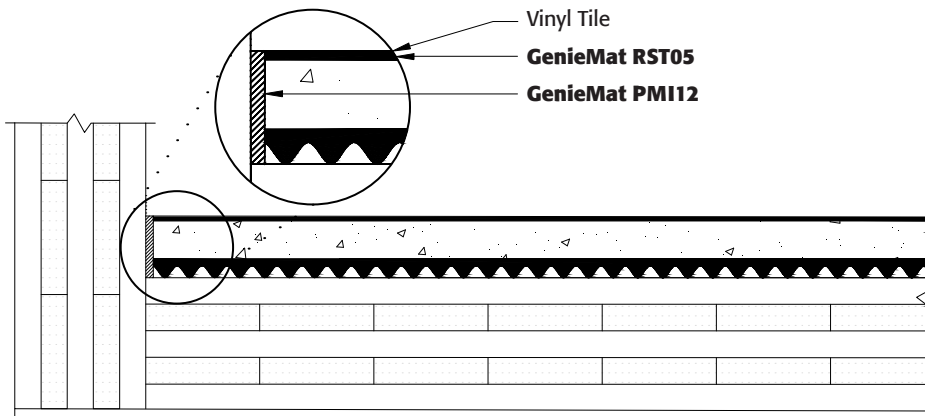


53  $R_w$       58  $L_{N,W}$   
 F6279.14

### 175 mm Cross Laminated Timber with 100 mm Concrete Topping on GenieMat FF50

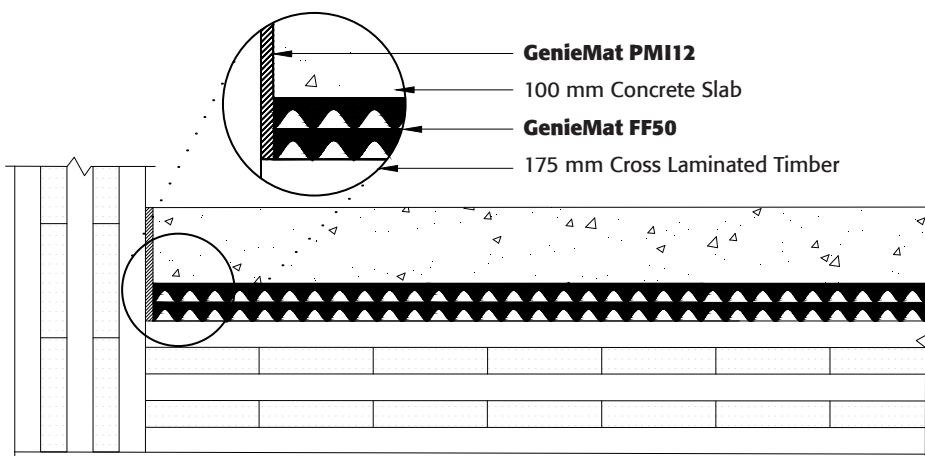

59  $R_w$       56  $L_{N,W}$   
 F5500.10

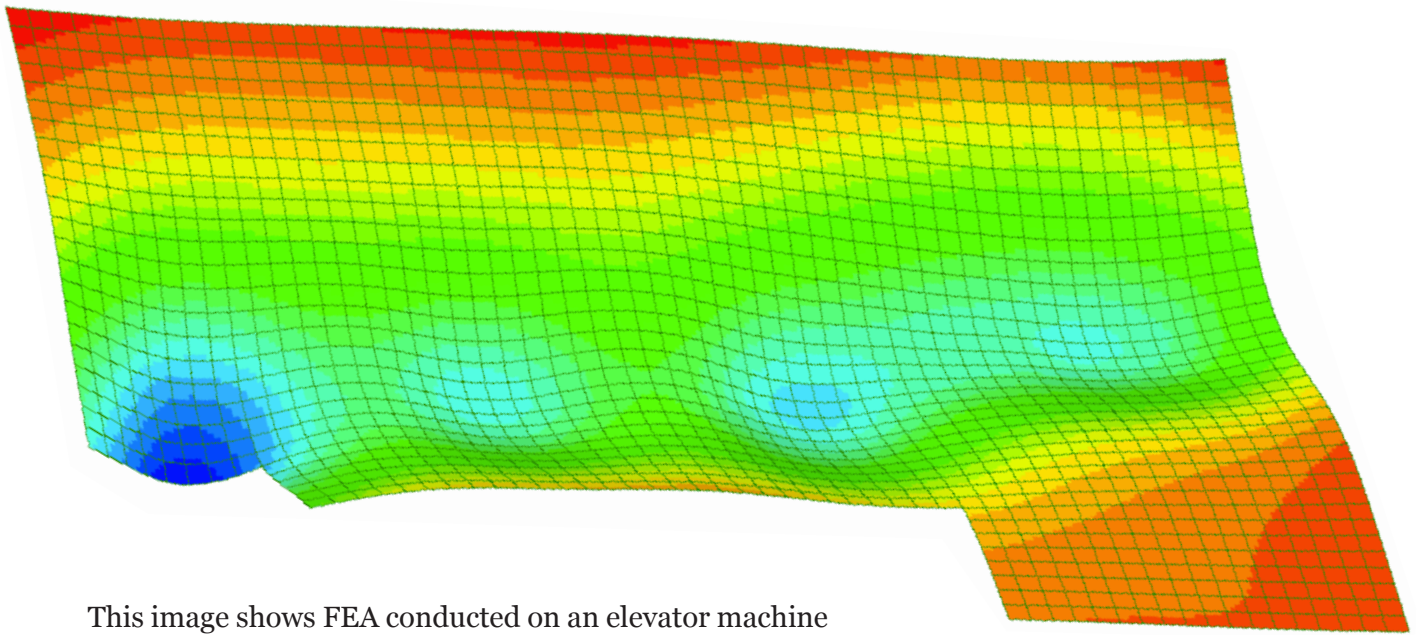

This image shows FEA conducted on an elevator machine room floating floor. The various colours show the varying loads and how much they will make the floor deflect.

Analysis requires only the structural drawings and a list of the dead and live loads.

This analysis allows for value engineering solutions to be assessed to find the most cost-effective solution

# TEST RESULTS

TEST RESULTS					
TEST REPORT	PRODUCT	FLOOR TOPPIN	STRUCTURE	R <sub>w</sub>	L <sub>N,W</sub>
B3498.1	None	None	150 mm Concrete Slab	53	78
F935-41976, F541-41780	<b>GenieMat® FF17</b>	100 mm Concrete Slab	150 mm Concrete Slab	70	49
F943-41992, F536-41779	<b>GenieMat FF25</b>	100 mm Concrete Slab	150 mm Concrete Slab	70	45
F920-41970, F539-41780	<b>GenieMat FF50</b>	100 mm Concrete Slab	150 mm Concrete Slab	72	43
F921-41970, F540-41780	<b>GenieMat FF75</b>	100 mm Concrete Slab	150 mm Concrete Slab	73	41
e8117.02	<b>GenieMat FF70</b>	100 mm Concrete Slab	150 mm Concrete Slab	64	46
F289-41701, F290-41701	<b>GenieMat FF06</b>	60 mm Screed	140 mm Concrete Slab	59	52
F292-41702, F291-41702	<b>GenieMat FF10</b>	60 mm Screed	140 mm Concrete Slab	59	51
F293-41702, F294-41702	<b>GenieMat FF17</b>	60 mm Screed	140 mm Concrete Slab	60	49
F296-41702, F295-41702	<b>GenieMat FF25</b>	60 mm Screed	140 mm Concrete Slab	61	47
F297-41702, F298-41702	<b>GenieMat FF50</b>	60 mm Screed	140 mm Concrete Slab	63	43
F6279.04	<b>GenieMat FF17</b>	45 mm Stone Pavers + 50 mm Adjustable Deck Supports	150 mm Concrete Slab	55	41
g2953.02	<b>GenieMat FF25</b>	(2) 12.5 mm Cement Board	150 mm Concrete Slab	55	51
g2953.04	<b>GenieMat FF25</b>	(2) 19 mm AdvanTech® Wood Subfloor	150 mm Concrete Slab	57	53
5014139, 7014190	<b>GenieMat FF06</b>	19 mm Gypsum Concrete	2x10 Wood Joist + <b>GenieClip RST</b> + 12.5 mm Plasterboard	59	58
5014142, 7014195	<b>GenieMat FF06</b>	Engineered Wood + 19 mm Screed + 19 mm Plywood	400 mm Open Web Truss + 12.5 mm Resilient Channel + 15 mm Plasterboard	56	57
g1707.11	<b>GenieMat FF06</b>	Vinyl + (2) 6 mm Cement Board + 19 mm OSB	450 mm Open Web Truss + 12.5 mm Resilient Channel + 15 mm Plasterboard	60	45
5014049, 7014060	None	None	Heavy Timber Floor	29	86
5014082, 7014109	None	100 mm Concrete Slab	Heavy Timber Floor	40	76
5014145, 7014200	<b>GenieMat FF42</b>	100 mm Concrete Slab	Heavy Timber Floor	54	59
7014194	<b>GenieMat FF42</b>	Vinyl + <b>GenieMat RST05</b> + 50 mm Screed + 25 mm Cement Board	Heavy Timber Floor	53	58
F5500.08	<b>GenieMat FF25</b>	100 mm Concrete Slab	175 mm CLT	57	60
F6279.14	<b>GenieMat FF25</b>	Vinyl + <b>GenieMat RST05</b> + 50 mm Screed	175 mm CLT	53	58
g1707.05	<b>GenieMat FF23</b>	100 mm Concrete Slab	175 mm CLT	56	58
F5500.10	<b>GenieMat FF50</b>	100 mm Concrete Slab	175 mm CLT	59	56

## CONTACT US

For Your Project Specific Questions

**Australia** +61 61 455 203 269 | **Middle East** +971 4 813 5501 | **UK** +44 203 9846444

**E.** info@pliteq.com.au



[www.pliteq.com.au](http://www.pliteq.com.au)